

MOLDED  
INTERIOR DOORS

**JELD-WEN**  
WINDOWS & DOORS



## OPEN UP A NEW LOOK

Just as a coat of paint can change the look of a room, interior doors can have a dramatic effect as well. And no one understands that better than JELD-WEN.

We offer a wide array of interior doors designed to highlight your personal style and add interest to any home. A JELD-WEN® Molded interior door can create a focal point in a room and accent a pantry or hallway closet, all while providing privacy and blocking sound.

The beauty goes far beyond the surface, with quality that is tangible. You'll feel it in the way these well-crafted doors open and close. You'll notice the quality and security of the hardware. And you'll come to appreciate the design, construction and flawless operation of these doors for years to come.

To us, a door is much more than an entryway. It's a design statement and part of the bigger picture of what makes your house a home.





## TABLE OF CONTENTS

Why Buy JELD-WEN® Interior Doors	5
<b>MOLDED INTERIOR DOORS</b>	
Craftsman III™ Smooth	6
Madison® Smooth	8
Rockport® Smooth	10
Conmore® Smooth	12
Carrara® Smooth	14
Cambridge™ Smooth	15
Camden® Textured	16
Princeton™ Smooth	17
Caiman® Smooth	18
Continental™ Smooth	19
Cashal® Smooth	20
Santa Fe™ Smooth	21
Corvado® Smooth	22
Avalon® Textured	23
Coventry® Smooth	24
Provincial® Textured	25
Colonist® Smooth	26
Colonist® Textured	27
Colonial™ Textured	28
Impression™ Mirror	29
Commercial Wide-Stile	30
ProCore®	31
Available Door Sizes	32
Warranty	34
About JELD-WEN	38



# WHY BUY JELD-WEN INTERIOR DOORS

JELD-WEN has long been a leader in setting trends, most notably for the quality of our products. A deeper look reveals what makes these molded interior doors truly special.

## Sustainable Materials



\* Including sawmill chips, field chips and leftover wood, JELD-WEN molded interior doors are made from wood that is the byproduct of other operations. It's a sound logging practice that minimizes waste, enables forests to flourish, and has been recognized with numerous certifications by Scientific Certification Systems (SCS). This engineered wood fiber is molded under intense heat and pressure into a high-density fiberboard, assuring consistent quality from door to door, room to room, and home to home. The doors resist shrinking, swelling, cracking and joint separation. All doors are available primed with a low VOC primer, ready to paint and can be specified in 1-3/8" and 1-3/4" thicknesses. All 1-3/4"-thick doors are available with 20-minute fire ratings and most designs are available with 45- and 60-minute fire ratings. More information can be found at [jeld-wen.com](http://jeld-wen.com). And we back it up with one of the best warranties in the industry.

## Engineered for High Performance

A commitment to excellence and innovation inspires everything we build. Each door is designed for ease of operation, low maintenance and beauty that stands the test of time. A wide range of colors, hardware and hardware finishes help you make the statement you want, in styles ranging from contemporary to classic.


## ProCore®

The solid core construction of this upgrade option reduces transmission of sound by up to 50 percent as compared to a hollow core door. A ProCore door adds privacy, peace and quiet, and stands up better to the dents and dings of daily life. It helps create a sanctuary for any room in your home.

For the full line of interior doors, visit [jeld-wen.com](http://jeld-wen.com).

## CRAFTSMAN III™ SMOOTH

This popular design reflects the unadorned, aesthetically balanced style created over a century ago. With its clean, geometric lines, this door is the perfect choice for traditional home door replacements or new construction, and is available as a ProCore® solid core door for noise reduction.

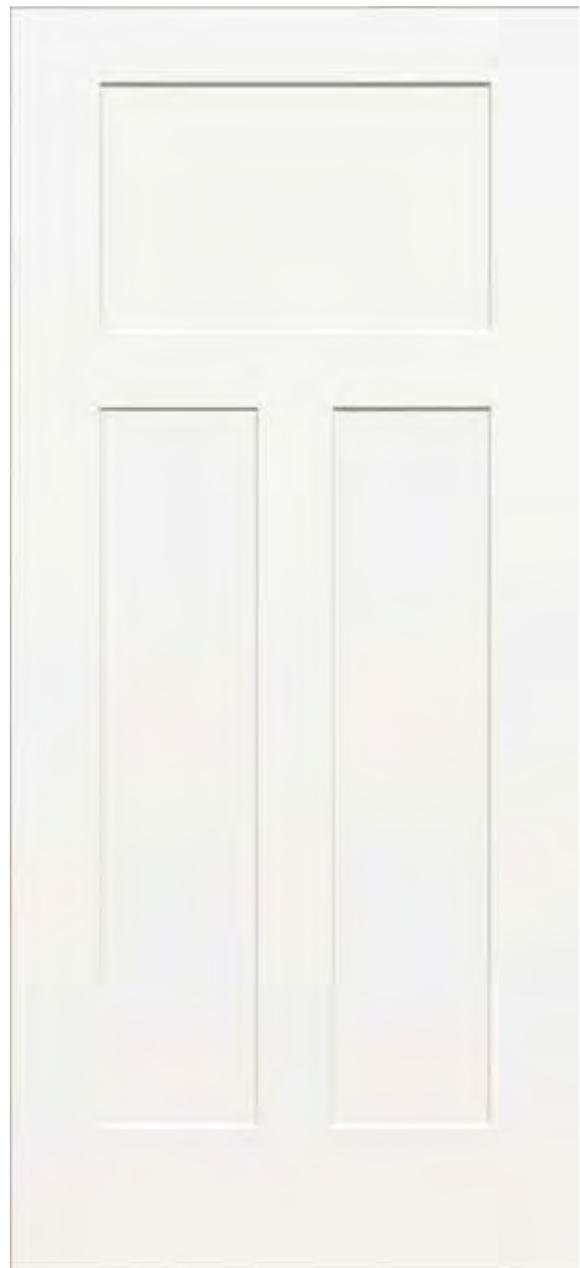





## MADISON® SMOOTH

Stately and elegant, the Madison® door offers simple, clean lines that accommodate a wide range of architectural styles. It's an ideal accent to any décor. As an option, choose the ProCore® solid core version of this door for added noise reduction and privacy.



## ROCKPORT® SMOOTH

Create a new look for any room with streamlined, contemporary style. Our Rockport® door is offered with multiple configuration options and, like the rest of our molded interior doors, can be ordered as a ProCore® solid core door. Its combination of style and construction will be with you for years to come.







## CONMORE® SMOOTH

Authenticity is at the heart of this molded, flat 5-panel door. This timeless style helps a passageway or closet make a statement with its classic design and smooth finish. Upgrade to the ProCore® solid core version and you also get additional noise reduction and privacy.





## CARRARA® SMOOTH

Artistry and sophistication set our Carrara® door apart from the ordinary. Its simple panel design adds depth and interest to complement most architectural styles. Various hardware options will also help you get exactly the look that's right for your home. The ProCore® solid core option adds privacy.



## CAMBRIDGE™ SMOOTH

Squared panels give this door a clean, precise look, while its Ovolo sticking profile adds dimension. Its simplicity adds to its versatility, making this a great choice for most home styles. For noise reduction, choose the ProCore® solid core option.



## CAMDEN® TEXTURED

The textured woodgrain surface of the Camden® door has the traditional look of solid wood. A variety of panel options and availability as a ProCore® solid core door ensure that you'll get exactly the right door for your home.

## PRINCETON™ SMOOTH

Stunning looks and proven operation make this door a great choice for a variety of tastes. Square panels are set off beautifully with a unique arched top, adding subtle elegance to any closet, passageway or pantry. Multiple hardware options also help match any home.





## CAIMAN® SMOOTH

This door presents three-dimensional moulding to deliver the added depth and enhanced beauty you expect from a custom wood door, yet at a better value. Like all JELD-WEN® molded interior doors, it is available as a ProCore® solid core door which greatly reduces noise transfer.

## CONTINENTAL™ SMOOTH

Every home is different and an interior door can make a big impression. The Continental™ door offers traditional style with unique proportioning of the panel designs. The combination of squared and arched carving gives this door both a familiar and unique look.





## CASHAL® SMOOTH

Panels within panels make this door stand out. Available primed, ready to paint and as a ProCore® solid core option for privacy, the Cashal® can stand out in most homes or simply fit in. The possibilities are endless.



## SANTA FE™ SMOOTH

Decidedly Southwest, the Santa Fe™ door presents grooved panels with a subtle flared archway. The result is a door that can fit in with several architectural styles, yet can stand out on its own. Choose the ProCore® solid core option for additional privacy.



## CORVADO<sup>®</sup> SMOOTH

This handsome style offers the warmth and richness of a traditional plank door with a distinctive groove and sticking pattern for added detail. Choose the ProCore<sup>®</sup> solid core door option and you'll benefit from noise reduction and durability, turning any room into a sanctuary.



## AVALON® TEXTURED

Classic and traditional, the Avalon® door offers three panels in unique proportions. Its appearance is both stately and welcoming with multiple sticking options to match personal styles. As a ProCore® solid core door, it adds privacy to bedrooms and bathrooms as well.



## COVENTRY® SMOOTH

The vertical lines and tall panels of the Coventry® door bring a look of prestige and distinction to any room without being overly formal. Choose the ProCore® solid core option and you'll have the added benefit of further noise reduction.

## PROVINCIAL® TEXTURED

This traditional 4-panel door, reminiscent of New England homes, fits beautifully in most any style of home. Subtle, flared top panels add visual interest. It's available primed and ready to paint whatever matches your personal style and color scheme.





## COLONIST® SMOOTH

Distinguished by more than a quarter-century of precise craftsmanship, it's no wonder this classic interior door style has so many imitators. Its elegant 6-panel design is a perfect match for traditional homes and is available with a variety of hardware options.



## COLONIST® TEXTURED

The popular Colonist® door is also available with a textured woodgrain look, giving it the appearance of a custom wood door. It's a great option to pair with furniture and other décor in your home. To dampen sounds from other rooms, choose the ProCore® solid core door option.



## COLONIAL™ TEXTURED

An American original style, this 6-panel door has a place in every home. Its Ovolo sticking profile matches most décors, while its familiar look is a welcome sight for all visitors. Available primed and ready to paint, it's a great choice for any home.

## IMPRESSION™ MIRROR

With the Impression™ mirror door, seeing is believing. Its large, inset mirror creates the effect of extra space and larger, brighter rooms. Whether in small bathrooms, bedrooms or narrow hallways, this design can truly change the dynamic of a home.





## COMMERCIAL WIDE-STILE

Substantial and dependable, molded Commercial Wide-Style doors are a great solution for the hospitality industry. These doors are available in the following styles with corresponding sticking profiles: Cambridge with Beaded (shown above); Continental Smooth with Ovolo; Colonial Textured with Ovolo; and Colonist Smooth with Cove & Bead.

# PROCORE<sup>®</sup>

THE QUIET DOOR<sup>®</sup>

## PROCORE<sup>®</sup>

ProCore<sup>®</sup> is available as an upgrade option with all our molded doors.

The solid core construction reduces sound transmission by up to 50 percent (compared to a hollow door) and withstands the dents and dings of daily life.

You select where privacy is preferred—most-common areas include home offices, bedrooms, playrooms and theater rooms.

### Construction

Solid core materials used inside the door affect the weight of the door, sound transmission, its ability to withstand impact and fire protection ratings.



# AVAILABLE DOOR SIZES

## SMOOTH SURFACE MOLDED DOORS

	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
<b>Craftsman III™</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
<b>Madison®</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
8'0" Smooth				X	X	X	X	X	X	X	X	X	X	X	C	X	X
<b>Rockport®</b>																	
6'8" Smooth					X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth								X	X	X	X	X	X	X	CB	X	X
8'0" Smooth					X	X		X	X	X	X	X	X	X	CB	X	
<b>Conmore®</b>																	
6'8" Smooth					X	X		X	X	X	X	X	X	X	S	X	X
7'0" Smooth					X	X		X	X	X	X	X	X	X	S	X	X
<b>Carrara®</b>																	
6'8" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
8'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
<b>Cambridge™</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
<b>Princeton™</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
<b>Caiman®</b>																	
6'8" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
8'0" Smooth					X	X		X	X	X	X	X	X	X	CB		
<b>Continental™</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
<b>Cashal®</b>																	
6'8" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
8'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
<b>Santa Fe™</b>																	
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
<b>Corvado®</b>																	
6'8" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
8'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
<b>Coventry®</b>																	
6'8" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
7'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X
8'0" Smooth	X	X	X	X	X	X		X	X	X	X	X	X	X	CB	X	X

Sticking Profile: B=Beaded, CB=Cove and Bead, C=Craftsman, S=Stepped Sticking, O=Ovolo

## SMOOTH SURFACE MOLDED DOORS (CONTINUED)

Colonist®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
7'0" Smooth					X	X	X	X	X	X	X	X	X	X	CB	X	X
8'0" Smooth					X	X	X	X	X	X	X	X	X	X	CB	X	X

## TEXTURED SURFACE MOLDED DOORS

Camden®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
7'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
Avalon®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
7'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
Provincial®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
7'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
Colonist®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
7'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
8'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	CB	X	X
Colonial™	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
7'0" Textured	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Textured					X	X	X	X	X	X	X	X	X	X	O	X	X

Sticking Profile: B=Beaded, CB=Cove and Bead, C=Craftsman, S=Stepped Sticking, O=Ovolo

## MIRROR MOLDED DOORS

Impression™ Mirror	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured								X		X	X	X		X	O		

## WIDE-STILE\* LIGHT COMMERCIAL DOORS

Colonial™	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Textured														X	O	X	
7'0" Textured														X	O	X	
Colonist®	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Smooth														X	CB	X	
7'0" Smooth														X	CB	X	
Continental™	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Smooth														X	O	X	
7'0" Smooth														X	O	X	
Cambridge™ Beaded	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
6'8" Smooth														X	B	X	
7'0" Smooth														X	B	X	

Sticking Profile: B=Beaded, CB=Cove and Bead, C=Craftsman, S=Stepped Sticking, O=Ovolo

\* Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

# JELD-WEN® LIMITED WARRANTY

JELD-WEN® Products<sup>1</sup> are designed to create lasting value for your home. This warranty is effective for JELD- WEN products manufactured on or after **May 1, 2012**, for use in the United States and Canada. Any previous warranties will continue to apply to products manufactured by JELD-WEN prior to this date. For additional information, including care and maintenance information, refer to [www.jeld-wen.com](http://www.jeld-wen.com) or [www.jeld-wen.ca](http://www.jeld-wen.ca).

## What this warranty covers

We warrant to the original owner<sup>2</sup> that if your JELD-WEN Product exhibits a defect in material or workmanship within the time periods from the date of purchase as specified below, we will, at our option, repair, replace or refund the purchase price of the product or component part. Skilled labor<sup>3</sup> (where deemed necessary by us) to repair or replace any component is provided for one (1) year from the date of purchase.

## Owner-Occupied Single-Family Residence Limited Warranty

**Door Slabs:** Except as set forth below, we warrant our door slabs, including any glass inserts, miscellaneous hardware and accessories provided and installed by us, as follows:

DOOR SLAB	COVERAGE
Fiberglass Exterior Doors	As long as you own and occupy your residence
FiberLast® Engineered Composite Exterior Doors	As long as you own and occupy your residence.
Steel Exterior Doors	Ten (10) years
Wood Exterior Doors	Five (5) years
Interior Doors	Five (5) years

**Factory Prefinish:** We warrant the factory-applied prefinish on our doors against peeling, checking or cracking for periods listed below. Should the factory prefinish be proven defective, we will at our option, replace or refinish the door or pay up to the credit indicated per opening to the current owner. (Note: this coverage applies to factory-applied finish coat options only; standard factory-applied primer is not a finish coat.)

PRODUCT	COVERAGE	REFINISH CREDIT
Aurora® Fiberglass Doors	5 years	\$350 per opening
Custom Exterior Wood Doors	1 year	\$250 per opening
Custom Interior Wood Doors	1 year	\$150 per opening
All Other Doors	1 year	\$100 per opening

**Door Frames:** We warrant our door frames for one (1) year from the date of purchase.

**AuraLast® Protection for Door Slabs and Frames:** Our AuraLast pine wood door slabs will be free from wood decay and/or termite damage for twenty (20) years from the date of initial purchase. Our AuraLast pine door frame components will be free from wood decay and/or termite damage for as long as the original consumer owns the home in which the AuraLast wood frames are originally installed. Warranty coverage outside Canada, the contiguous 48 states and Alaska is contingent upon approval from the JELD-WEN Customer Care Department. Please contact us.

**Severe Weather® Glass:** We warrant each Severe Weather glass unit for ten (10) years.

**Retractable Screens:** We warrant retractable roll screens for five (5) years.

**Spontaneous Glass Breakage:** We warrant sealed glass units installed in exterior doors (excluding laminated glass, and special glazings) for spontaneous breakage for one (1) year (including free replacement glass and skilled labor<sup>3</sup> necessary to replace the glass for one (1) year). Spontaneous breakage occurs when the glass develops a crack without sign of impact.

## Commercial Limited Warranty (Other than Owner-Occupied Single-Family Residence)

**Fiberglass, FiberLast, Steel, Wood and Interior Door Slabs:** We warrant our door slabs for five (5) years from the date of initial purchase.

**All Other Products, Components, Prefinishes and Options as Listed Above:** Coverage is the same as for Owner-Occupied Single-Family Residences as listed above.

### Transferability

This warranty is not transferable.

### How to Get Assistance

If you have a problem with your JELD-WEN door immediately upon discovery, contact the distributor or dealer from whom you purchased our product or contact us directly:

IN THE UNITED STATES:	IN EASTERN CANADA:	IN WESTERN CANADA:	IN ONTARIO CANADA
JELD-WEN Customer Care Attn: Warranty Claims P.O. Box 1329 Klamath Falls, OR 97601	JELD-WEN Service Department 90, rue Industrielle Saint-Appollinaire, Quebec Canada G0S 2E0	JELD-WEN Service Department 550 Munroe Avenue Winnipeg, Manitoba Canada R2K 4H3	JELD-WEN Service Department 90 Stone Ridge Road Vaughan, Ontario Canada L4H 3G9
PHONE 888-JWHelpU 888-594-3578 FAX 800-436-5954	PHONE 888-JWHelpU 888-594-3578 FAX 800-436-5954	PHONE 888-JWHelpU 888-594-3578 FAX 800-436-5954	PHONE 888-JWHelpU 888-594-3578 FAX 800-436-5954
EMAIL jeldwenwarranty@jeldwen.com		EMAIL wpgservice@jeld-wen.com	
www.jeld-wen.com/contact-us			

We can respond quickly and efficiently if you provide the following: a) date and location of purchase, or product identification from the tag on the top edge of the slab, b) how to contact you, c) the address where the product can be inspected, and d) a description of the apparent problem and the product (photographs are helpful).

### What We Will Do

Upon receiving your notification, within three business days we will send out an acknowledgement to the contact which you have provided. We will investigate your claim and will begin to take appropriate action within 30 days after receipt of notification. If your warranty claim is denied, we may charge a fee for an on-site inspection that is required or requested by you.

If your claim is accepted, and we choose to repair or replace the product or a component of the product, the replacement product/component will be provided in the same specification as the original product. Replacement products, components and services are warranted for the balance of the original product or service warranty, or 90 days, whichever is longer.

If the claimed nonconformity is warp of a door slab, we may defer repairing or replacing the door slab for a period up to 12 months from the date of claim. It is not uncommon for a temporary warp condition to occur as the door slab adjusts to local humidity and temperature conditions. This deferral will not be counted against the warranty period.

### What This Warranty Does NOT Cover

JELD-WEN manufactures and sells both individual door slabs and complete door systems. This warranty does not cover parts or components (e.g., locksets, handles, etc.) not sold by JELD-WEN to the original owner. See your distributor or dealer regarding the warranty on the entire door system and/or these other components.

## We are not liable for:

- Normal wear and tear, including normal wear and tear of weatherstrip; and natural weathering of surfaces or variations in the color or texture of wood or finish; surface cracks that are less than 1/32" in width and/or 2" in length; for knotty alder and juniper: surface checks that are less than 1/8" in width and/or 5" in length and knot placement, quantity or size.
- Problems due to misuse or abuse; failure to follow the care and maintenance instructions; or as a result of any cause beyond our reasonable control (e.g., fire, flood, earthquake, other acts of nature and acts of third parties outside of our control).
- Problems related to: improper field finishing of all surfaces (front and back) and edges (top, bottom and sides) of the door slab and frame (See our Finishing Instructions at [www.jeld-wen.com/resources](http://www.jeld-wen.com/resources)); variation or unsatisfactory results in sheen or texture resulting from the field application of paint or any other finishing material.
- Failure to provide an adequate overhang for exterior doors; damage caused by extreme temperature buildup where storm doors are present. For general guidelines, see our "Appropriate Protection for Exterior Doors" in our product literature or at [www.jeld-wen.com/resources](http://www.jeld-wen.com/resources); for specific information pertaining to your structure, consult your contractor or other building professional.
- Warp for any 3'6" wide by 8' 0" high by 1 3/4", or smaller door slab, which does not exceed 1/4" in the plane of the door slab itself; door slabs wider and/or higher are not guaranteed for warp.
- Bow or misalignment in the frame or jamb in which the door slab is hung (if such is purchased from JELD-WEN unmachined and not prehung).
- Slight expansion or contraction due to varying environmental conditions; slab movement (shrinkage or swelling) of 1/4" or less due to temperature and humidity; consult our Care & Maintenance documents on how to work with this natural movement.
- Wood decay for wood components other than of AuraLast pine; and wood decay for any wood components (including pine) that come in direct contact with soil. Note: superficial mold/mildew does not indicate wood decay.
- Problems related to water and/or air infiltration due to improper assembly; installation errors or flaws in building design and construction; installation must be in strict conformance with the installation instructions provided by the manufacturer of the door entry system.
- Structural integrity issues or other problems caused by improper field fitting of the hardware, improper sizing of the door slab or other assembly problems.
- Slight imperfections or wavy distortions in the glass that don't impair structural integrity. Note: wavy distortions in the glass (e.g., related to laminate interlayer or heat strengthening of glass) are not considered a defect. Slight color variations in glass are not considered a defect.
- Screen damage due to normal wear and tear, misuse, abuse, or insect or animal activity.
- Condensation or damage as a result of condensation (Note: unless due to insulating glass failure, most condensation problems are related to excessive humidity levels in a structure; contact a heating/air conditioning specialist for help).
- Damage or poor product performance resulting from installation into a condition that exceeds product design standards and/or certified performance specifications and/or does not comply with applicable building codes.
- Hardware, accessories or inserts that are not provided by us.
- Discoloration or rusting of decorative metal accent options, such as grilles, clavos, straps, etc.; discoloration of wood sills provided by us.
- Cost for labor, removal or disposal of defective product(s), installation or finishing of the replacement door or component.
- Incidental or consequential damage. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so this may not apply to you.

**IMPORTANT LEGAL INFORMATION — PLEASE READ THIS CAREFULLY. IT AFFECTS YOUR RIGHTS.**

This Limited Warranty document sets forth our maximum liability for our products. We shall not be liable for special, indirect, consequential or incidental damages. Your sole and exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be as specified above. We make no other warranty or guarantee, either express or implied, including implied warranties of merchantability and fitness for a particular purpose to the original purchaser or to any subsequent user of the Product, except as expressly contained herein. In the event state or provincial law precludes exclusion or limitation of implied warranties, the duration of any such warranties shall be no longer than, and the time and manner of presenting any claim thereon shall be the same as, that provided in the express warranty stated herein. This Limited Warranty document gives you specific legal rights, and you may have other rights that vary from state/province to state/province.

Any dispute, controversy or claim arising out of or relating to this warranty, any alleged breach thereof, or the use or sale of the products to which this warranty applies shall be resolved by mandatory and binding arbitration administered by the American Arbitration Association in accordance with its commercial arbitration rules. Original purchaser agrees that they may assert claims against JELD-WEN in their individual capacity only, and not as a plaintiff or class member in any purported class action proceeding. Rejection of these dispute resolution provisions must be sent to JELD-WEN at the address provided herein within thirty (30) days of original purchaser's receipt of the Products to which this warranty applies.

No distributor, dealer or representative of JELD-WEN has the authority to change, modify or expand this warranty. The original purchaser of this Product acknowledges that they have read this warranty, understand it and are bound by its terms and agrees to provide this warranty to the original owner of the structure into which the Product is installed.

1 "JELD-WEN Products" shall refer to window and patio door products (except United Collection products) manufactured in the United States and/or Canada and marketed under the JELD-WEN brand name for use in the United States and/or Canada. See our separate United Collection warranty, or our Export Warranty for applicable coverage on products used outside the United States and Canada.

2 "Skilled labor" refers to tasks where specialized technical knowledge, experience, methods or tools are required to properly identify, diagnose and/or correct product-related problems.

3 "Chalking" of the exterior finish is not a defect unless it exceeds a numerical rating of eight (8) when measured in accordance with the standard procedures specified in ASTM D4214. Fading or changing in color of the exterior finish is not a defect unless it exceeds five (5) E units, calculated in accordance with ASTM D2244, paragraph 6.2. Color change shall be measured on an exposed area of finish that has been cleaned of surface soils and chalk, and the corresponding values measured on the original or unexposed area of finish. Fading or color changes may not be uniform if the surfaces are not equally exposed to the sun and elements. If the above ASTM standards change, the standard in effect at the time of purchase applies. As an option to replacement, we may choose to refinish the product.

© 2015 JELD-WEN, inc. All rights reserved.

## ABOUT JELD-WEN

Since 1960, when JELD-WEN began with one millwork plant, we've been dedicated to crafting windows and doors that enhance the beauty and functionality of your home. Today we continue that tradition with products that are durable and worry-free. It's the result of innovation being the driving force in all that we do.

It begins in the forests where we harvest our premium lumber. In addition to responsible reforestation practices, we reuse and recycle as much of our raw resources as possible. Innovation is also at the heart of our design and manufacturing process. With JELD-WEN, you can expect products that are more than just beautiful on the outside. The inner workings of our windows and doors are engineered to function flawlessly for years to come.

Our extensive product offering is available globally through multiple distribution channels, including retail home centers, wholesale distributors and building products dealers. Whether it's a modern or classic style, a unique hardware option or an advance in the way our products operate—great homes start with JELD-WEN.





© 2015 JELD-WEN, inc.; Door designs and this publication are owned by JELD-WEN, inc. and are protected under the U.S. Copyright Act and other intellectual property laws. All trademarks, service marks, logos and the like (whether registered or unregistered) are owned by JELD-WEN, inc. or others. Unauthorized use or duplication of JELD-WEN intellectual property is prohibited. JELD-WEN reserves the right to change product specifications without notice. For current information, please visit our website, [jeld-wen.com](http://jeld-wen.com).

10-92821 03/15 (TBD 03/15 XM)